


CAVIUS

PRODUCT TYPE: MAINS POWERED SMOKE ALARM WITH WIRELESS INTERLINK PRODUCT NUMBER: 2201-001

WIRELESS
ALARM FAMILY
SMOKE
ALARM




MAINS
POWERED



DANISH
DESIGN



100%
TESTED

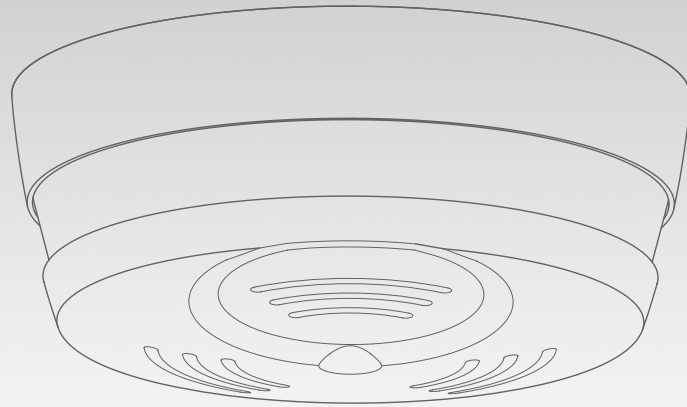

WIRELESS
ALARM FAMILY

MAINS
POWERED
SMOKE



reddot award 2016
winner



CE¹⁷
0333
EN14604 : 2005/AC:2008
DoP no.: 2201-001





CAVIUS

PRODUCT TYPE: MAINS POWERED SMOKE ALARM WITH WIRELESS INTERLINK

PRODUCT NUMBER: 2201-001

PRODUCT DATA:

SMOKE ALARM TYPE:

Mains powered smoke alarm device with wireless interlink and battery back-up.

USAGE:

Designed for installation in private homes. The smoke alarm can be used as lamp outlet or alone. The alarm can be mounted on top of a conduit box or on the ceiling with the enclosed base.

The alarm can be connected with other alarms from the Cavius Wireless alarm family.

ISOTOPE ACTIVITY:

Absence of radioactive substances

OPERATION AC/DC:

110V AC, 230V AC

BATTERY TYPE:

Replaceable Duracell CR2 back up battery

POWER CONSUMPTION:

Power consumption 161mAh in the non alarm condition

BATTERY LIFE:

Minimum 10 years life of back up battery

INTERLINK FREQUENCY:

868MHZ

RANGE:

Minimum 100m in open field. Range depends on the building materials and will need to be tested in each individual case.

LOW BATTERY INDICATION:

A short acoustic "beep" will sound and LED flash every 48 seconds when the voltage is below 2.85V. In this stage it will continue for minimum 30 days, and can drive the alarm for 4 minutes.

NORMAL OPERATION:

Red LED flashes every 48 second for normal operation. Green LED shows mains power on

SOUND:

Audible indicator min. 85 dB @ 3 meter in anechoic chamber

SOUND PATTERN:

Fire alarm condition is indicated by a series of three successive tones

VISIBLE INDICATORS:

A red LED is used to indicate the following conditions:

- fire alarm condition is indicated by a flash every 0.5 second
- smoke sense speed up is indicated by a flash every 2 seconds when the smoke level is at the alarm threshold
- normal operation is indicated by a flash every 48 seconds
- A green LED is used to show the alarm is powered by mains supply

MAINTENANCE:

Slots in the top cover above the smoke chamber allows easy access for vacuum cleaning. Testing of alarm can be done at the same time via a push button switch built into the top of the alarm for easy access.

PUSH BUTTON:

The smoke alarm includes a push button switch built into the top of the alarm for easy access. This button has the following functions:

- set up - Press the button to start sending out a specific house code to the others alarms
- hush – during an alarm condition this immediately silences the alarm when pressed. When the button is released, the alarm remains silenced for 10 minutes
- test – when not in alarm the sounder can be activated to provide a sensor OK test function. While the button is pressed, the audible and visible indicators are activated if the sensor is OK

MAINTENANCE:

Top cover designed for easy to access vacuum cleaner nozzle

WARRANTY:

10 year

PRODUCT WEIGHT (GR):

Base alarm weight (excluding screws, plugs and mounting ring): 200g



CAVIUS

PRODUCT TYPE: MAINS POWERED SMOKE ALARM WITH WIRELESS INTERLINK

PRODUCT NUMBER: 2201-001

PRODUCT DATA:

OPERATING TEMPERATURE:

-10°C TO +70°C

OPERATING HUMIDITY:

Up to 90% RH non-condensing

DETECTION TIMING:

The alarm makes an optical reading every 8 seconds. At unusual readings (going into alarm stage), the readings are taken every 2 seconds.

INSTALLATION POSITIONS:

Ceiling. Set of 2 x screws, 2 x plugs and ceiling base included

APPROVALS:

EN 14604:2005
EN60065
EN300-220
ROHS
REACH

CE TESTING INSTITUTE:

CNPP

NOTIFIED BODY:

AFNOR Certification

ADDITIONAL TESTING AND APPROVALS:

SGS (RF Approval)

AWARDS:

Red Dot 2016 Design Awards



reddot award 2016
winner

ASSOCIATIONS:

Cavius is member of GIFSID, manufacturers' association of domestic fire safety equipment

STORAGE TEMPERATURE:

-20°C to +60°C

STORAGE HUMIDITY:

Up to 93% RH non-condensing

QUALITY ASSURANCE:

SOUND LEVEL:

100% tested in special designed sound chamber

SENSITIVITY:

100% tested in special designed test tunnel made by world leader AWT (UK)

POWER CONSUMPTION:

100% tested

BATTERY VOLTAGE AND INTERNAL RESISTANCE:

100% tested

ALARM FUNCTION:

100% tested

INTERCONNECTION:

100% tested

VISUAL APPEARANCE:

100% tested

PACKING CONTENT:

100% tested

CONTACT


www.cavius.com

MANUFACTURER

Manufacturer: Cavius Aps, DK8600

CAVIUS

WIRELESS.
ALARM FAMILY

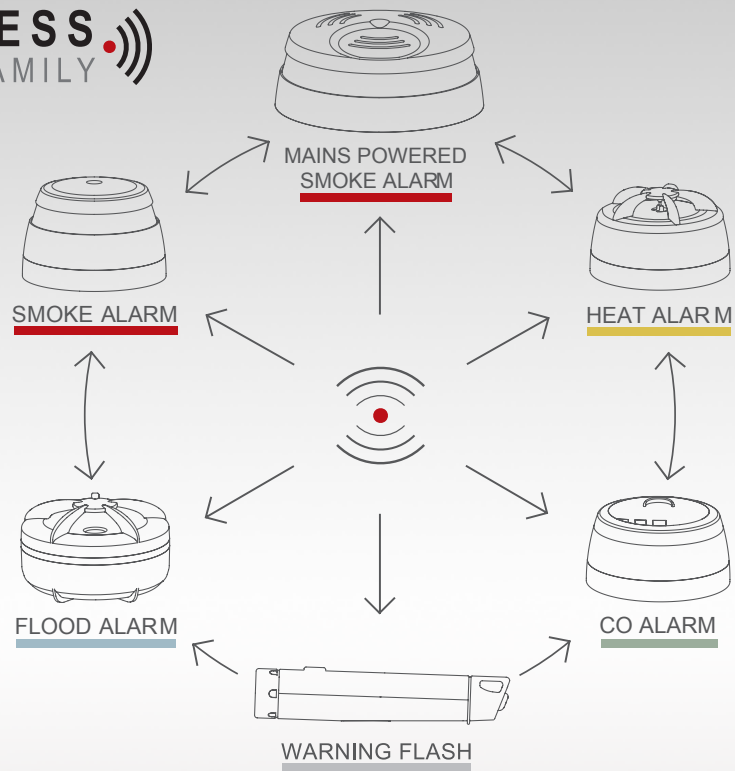

Diameter: 97 mm

DISTRIBUTOR: